


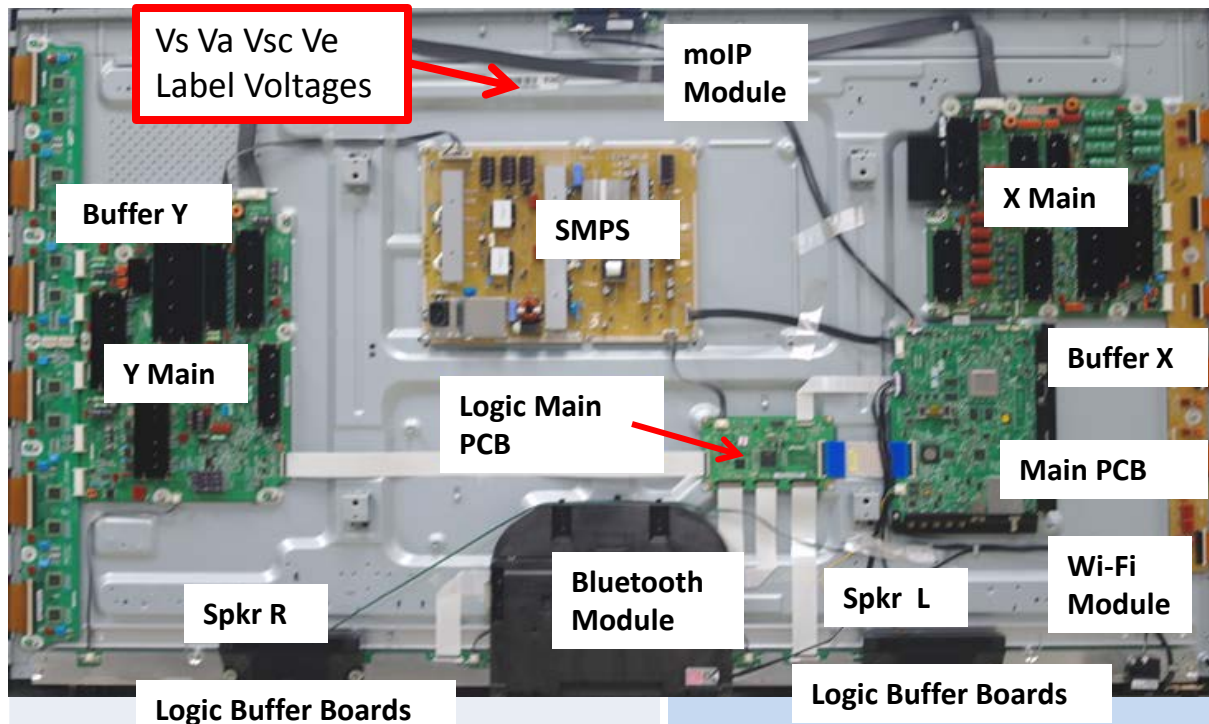

HELP : 888-751-4086; 866-894-0637 FE)

GSPN

<http://gspn3.samsungcsportal.com>

PLUS ONE

<http://my.plus1solutions.net/clientPortals/samsung>

HOT TIPS

- Check for continuous Firmware upgrade for this model series...

-Motion Control command problems are related to Firmware upgrade and room environments. Check room environment and user operation understanding and conditions.

FIRMWARE

2012 PDP Echo-P Firmware (1018.2)
5/25/12

Avail on GSPN or Samsung,Com


Always check for latest updates

SERVICE BULLETINS

4/2/12 ASC20120402001 : Voice Command issue ... Fix: Update to latest firmware

Quick Parts: Verify before Ordering

Parts Category	Parts No	Short Description
PCB	BN44-00511A	SMPS
PCB	BN94-04967F	Main PCB
PCB	BN96-21431C	RF module PCB
PCB	BN96-21750B	Function PCB
PCB	BN96-22010A	Logic Main PCB
PCB	BN96-22011A	Buffer E
PCB	BN96-22012A	Buffer F
PCB	BN96-22013A	X Main
PCB	BN96-22014A	Y Main
PCB	BN96-22015A	Buffer X
PCB	BN96-22016A	Buffer Y
Display	BN96-22038A	Panel
Cosmetic	BN96-16959C	Stand Base
Cosmetic	BN96-22151A	Front Cover
Cosmetic	BN96-22154A	Rear Cover
Cosmetic	BN96-22952A	Stand Guide
Component	3903-000552	Power Cord
Component	AA59-00626A	Remote
Component	BN96-21672A	Speaker
Component	BN96-22667A	camera module
Component	BN96-22728A	LVDS Cable
Accessory	4301-000103	Battery
Accessory	BN63-02368B	Cleaning Cloth
Accessory	BN81-07013A	3D Glasses

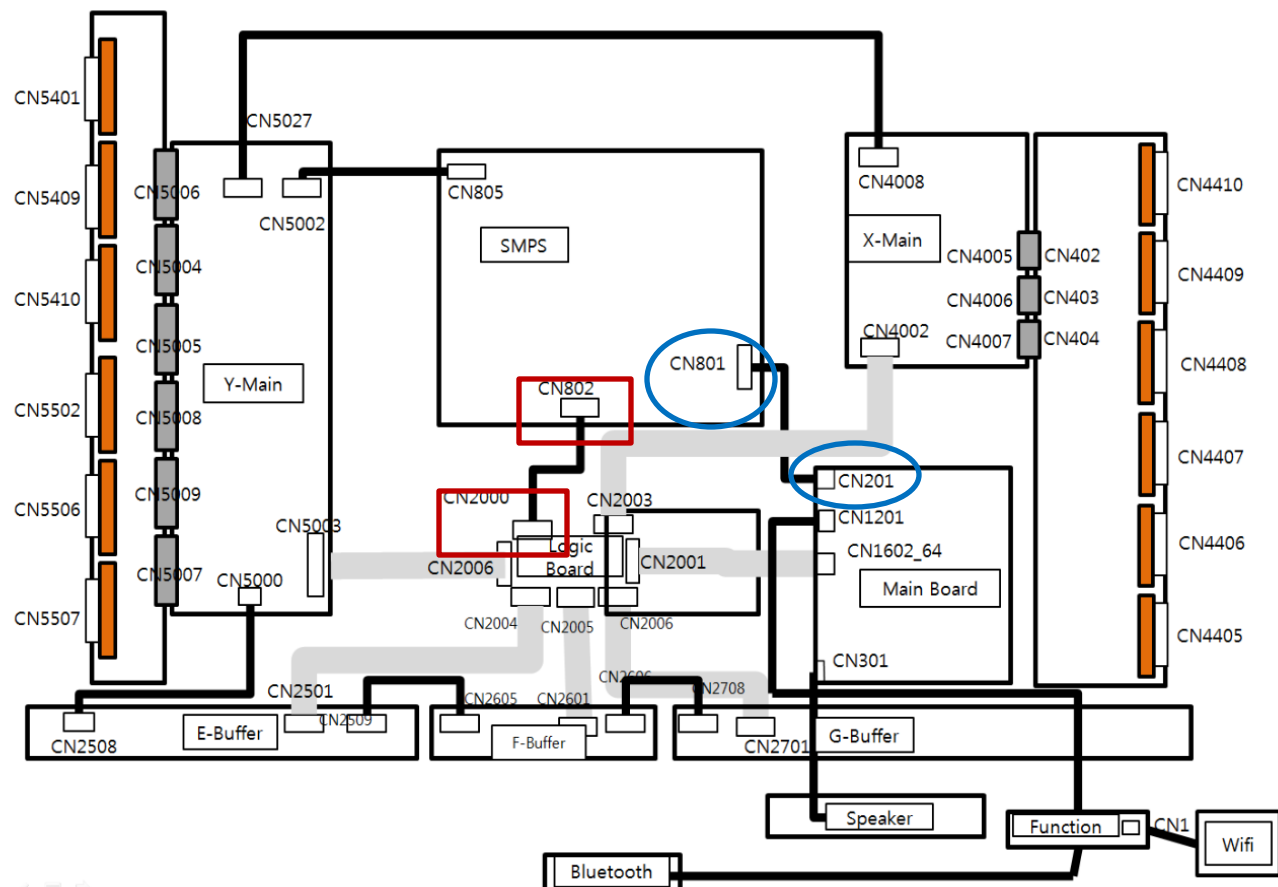

CN801(SMPS) - CN201(MAIN)

Pin No.	Signal
1	PS_ON
2	STBY
3	GND
4	15V
5	GND
6	GND
7	D5.3V
8	D5.3V
9	GND
10	15V
11	15V
12	D5.3V

Power On Sequence


- STBY 5V** (Pin 2 CN801)
- PS_ON** (approx 3.3V – 0V) (Pin 1 CN801)
- Low Voltages On** 5.3V & 15V (Voltage Signals listed in Charts)
- VS_ON** (approx 0V – 3.3V) (Pin 6 CN802)
(Power Supply sends Vs to Y & X Boards, & Va to Logic Buffer Boards.)
- TV on with **Boot Logo** appearing.

CN802(SMPS) - CN2000(LOGIC)

Pin No.	Signal
1	D5.3V
2	D5.3V
3	GND
4	VS_CON
5	PS_ON
6	VS_ON

Activating Power & Logic Board Test Patterns without Main Board:



1. Remove Power Cord to Panel
2. Short Highest 2 Pin #s on Logic Board Test Jig (Can be 4 Pin or 6 Pin)

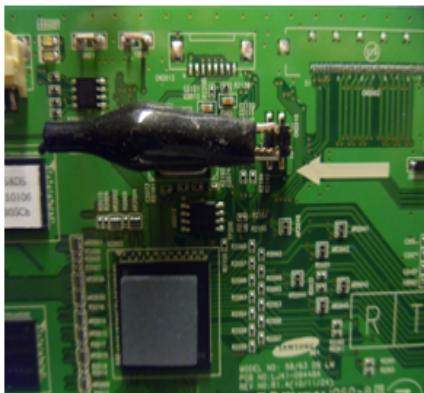

3. Remove Power Connector at Main Board (keeping connection to SMPS)
4. Short "Power On" Pin to Circuit Ground on Power Connector to SMPS.
5. Connect Power Cord to Panel



Fast Track Troubleshooting Manual

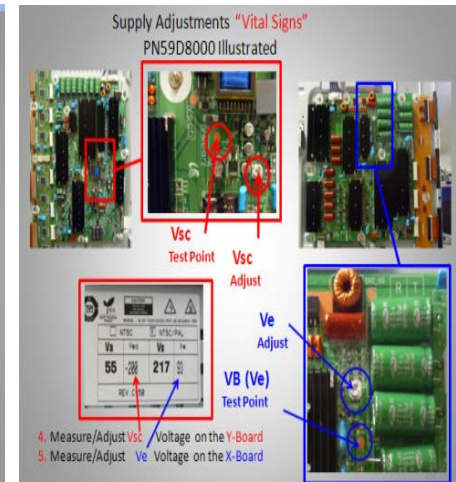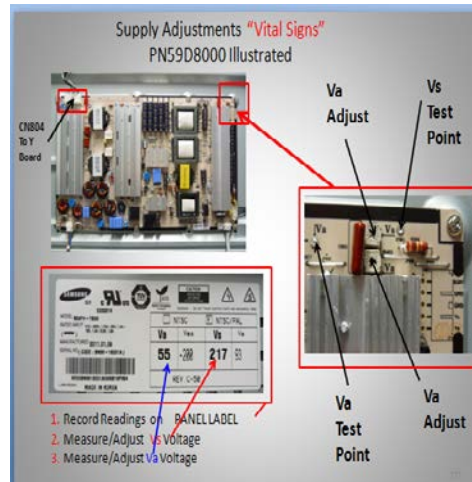

SAMPLE VIEW & READINGS

VITAL SIGNS check Vs, Va, Vsc & Ve

When troubleshooting, It's very important to first check **Vs, Va, Vsc & Ve**. If **Vs** is missing (0V), disconnect power and check for short. Use ohm meter to measure resistance while disconnecting Y-Board & X-Board supply feeds one at a time.

Turn Power On and Test SMPS with short connector removed for correct Vs voltage verification. (It may only come up briefly but to full level). Again be careful not to reconnect Power Connectors until Vs falls below 10V.

If **Va** is low or missing, disconnect Supply Feed to Address Boards and Check to see if SMPS Supply is restored. (Note Va feed normally passes through the Y-Drive to the Address Boards (Logic Buffer Boards)).

If **Vsc** is low or missing and Vs was OK, the failure is with the **Y-Board** since the Y-Board generate the Vsc voltage from the Vs supplied by the SMPS.

If **Ve** is low or missing and Vs is OK, the failure is with the **X-Board** since the Ve is generated by the X-Board from the Vs supplied by the SMPS. Please note in some rare cases the Ve may be generated by the Y-Board feed to the X-Board.)

Other SMPS Voltages:

Check Low Voltage feeds to the Main Board and other supplied Assemblies.

Power Supply Trouble Shooting Notes:

2010/2011/2012 models

Will not be run with the "X" or "Y" main disconnected. The SMPS will shut down immediately. However if a meter is first connected to the test point when power is applied it will read the correct voltage briefly before shutting down. (You have enough time to check key voltages)

CAUTION: Do not reconnect any connectors to SMPS or Y/X Boards until power has been turned off long enough for Vs to drop below 10V or damage will occur to X or Y Boards.

Over Current Protection



For the SMPS Power Supply... If a short circuit occurs on either the VS or VA voltage lines, the SMPS stops operating, but should not fail. When the short circuit is removed from the source line, the Power Supply will operate normally again. **Many SMPS Supplies are replaced needlessly!**

MoIP Module Troubleshooting

Troubleshooting - Camera/Microphone Module



1. Enter Test Mode:

- TV Power On
- Using Standard Remote Control
- Press:
Mute, 569, Exit





Camera
Vertical Height Adjust

2. Speak into (Left) Mic Verify its OK with sound from speakers



3. Press Enter

4. Speak into (Right) Mic Verify its OK with sound from speakers.



5. Press Exit



"Preview Test OK" only
Indicates test completed.
Not no error exists.

Camera & **Left** Mic
Activated


Camera & **Right** Mic
Activated

Troubleshooting - Camera/Microphone Module

1. Menu / System
2. Verify "Voice and Gesture Control" is Available.
3. Try making selection
4. If it is Grayed out the moIP Module is not active.




NORMAL

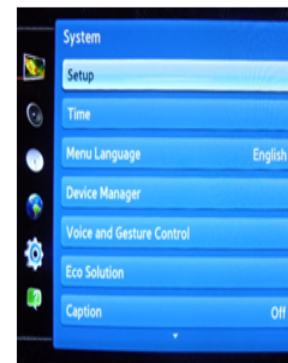


Voice & Gesture Control
Normal Screen.

ERROR

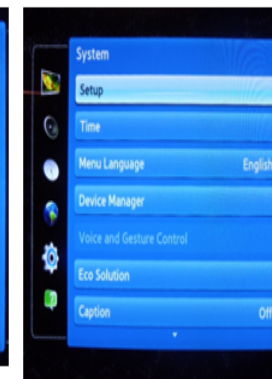

Voice & Gesture Control
Grayed Out-Not Available

ERROR

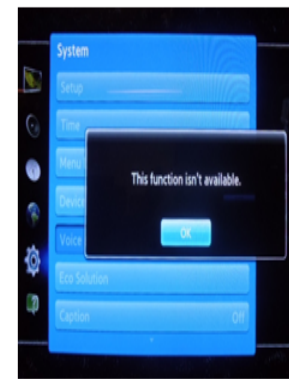

Voice & Gesture Control
"This Function isn't available"

Function Control Troubleshooting

5 Directional Function Control


UNEH4000 Sample



CN702 (FUNCTION)			
1	IR	5	MSDA
2	GND	6	KEY1
3	A3.3V	7	KEY2
4	MSCL	8	GND


All Functions can be Tested in Standby Mode

(Standby Voltage)

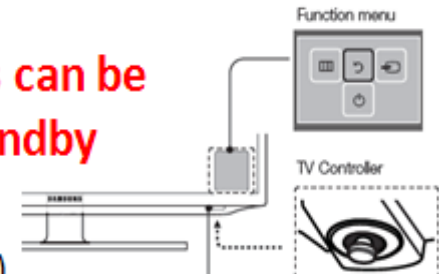

Command	PIN	Signal	DC Voltage/Notes
IR	1	IR	3.3V to 2.5V DC with any Remote Control Commands
Press	6	Key 1	3.3V to 0.0V DC
Left	7	Key 2	3.3V to 1.6V DC
Right	7	Key 2	3.3V to 2.5V DC
Up	7	Key 2	3.3V to 0.0V DC
Down	7	Key 2	3.3V to 0.8V DC

Actual IR Signal

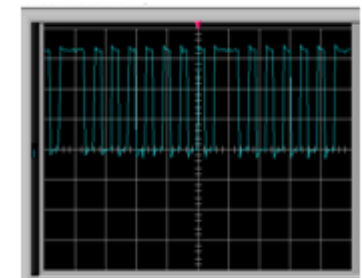

4V P-P Data

✓ Standby **A3.3V** on Function Connector, Pin 3.

✓ All Pins should read **3.3V** before commands.

✓ **Press**, at Key 1, Pin 6. 3.3V to 0.0V DC

✓ **Left, Right, Up, Down** at Key 2, Pin 7. Check **specific voltages** on chart.

2012 PDP Signal Path for Troubleshooting



ON SCREEN FAILURE EXAMPLES:

ALIGNMENTS:

"Y" Board Failure Examples

Notice how each error contains a horizontal line

These examples show Y board errors, because the Y electrodes run horizontally, errors can often be seen across the screen.

2010 & 2011 Y board errors will be detected by the Logic Board and often create a High Voltage Power Down ("VS ON" to Off) condition.

When failure exists on either the Y-Board or the Y-Buffer Boards, be sure to replace both assemblies. A failure on either Board can create a failure on both assemblies.

Y Buffer Boards Failures

Y-Buffer Failures will often show blown Scan ICs & will create either Panel Power Down

Or

On Screen Errors across the screen as shown in examples

Two Output Lines on Scan IC Are open or connector to Panel is open.

Bottom 2 Scan ICs affected. (12 ICs total = 3/8 of video)

"X" board Failure Examples

- In this left screen example, the sustain signal from the X board is low or missing.
- For 2009 Models and Older: Verify operation of the X board by disconnecting the power supply cable to the X board. If the other boards are working the picture will be dark.
- If the X-Board Power or Y-Board Power is removed, however, on 2010 or 2011 Models, an error will be detected and the VS Supply from the SMPs will be turned off by the Logic Board. A Black Screen (on right) will occur.

"X" board Failure Examples

- In this example the V_e initialize signal is low or missing creating image retention. No Erasing.
- Troubleshoot the X Board by verifying that the V_e Voltage is correct with the label on the Panel.

Logic Board Failure Examples

Screen vertical Noise Errors usually in Multiple Locations

The examples show the panel illuminated but displays with incorrect noisy video.

Logic Buffer Board Failure Examples

Normal Video Screen with added Vertical Black, Red, Green, or Blue Bar Errors

The examples show the panel illuminated, display is Normal except for area of Logic Buffer Board Failure.

Main Board Failure Symptoms

- Main Board errors are similar to logic errors but the problem can be on a single source such as the tuner.
- If the Menu also shows the defect the main board is suspected

PDP Panel Troubleshooting

Plasma Panel Failure Examples

- Plasma Panel failure can usually be identified by observation. Single sub pixel columns or rows that are black or white always are panel failures. Other lines or lines that vary with content are almost never panel failures. Individual pixel errors are almost always panel related.

1. Check/Adj. VS, VA, VE, & VSC according to Panel Label and Diffusion test. (see bulletins for any special notes before making changes)



DIFFUSION TEST/ADJ. (cell miss-firing)

- Allow the unit to warm up 15 to 20 minutes
- Access the Burn Protect Sig. Pattern in Cust. Menu.
- Adjust the Vs volts until screen errors are gone in both dark and bright areas.
- Adjust the Vs volts within +/- 10V on the panel label.
- **NOTE: Diffusion may appear with aging panels.**
New panels with Diffusion consult bulletins and/or report problem.

2. Check/Set Option Bytes:

Factory Reset	
Type	51ESCrD
Local Set	US
Basic Model	PE8000
SVC Model	8000
TUNER	ECHO_CV
Front Color	P-W-D-Gy